

1175 Clark Fork Ln.
Revised Scope of Work
By the City and County of Missoula
Project previously quoted by Grizzly Fence

Permanent Fence Lengths:

- 140' away from the Poplar Plantation Fence start the permanent fence.
- 141' feet to the pivot point near the existing gate.
- Within that 141' there will be a 16' gate installed on wheels that roll parallel with the fence. Same as previous location on original specs that were bid on.
- From there run 122' East to the point where you will be placing a rolling gate across the road for the compost facility which will be part of a different quote.

Temporary Fencing Lengths:

- 790' of fence to surround the temporary shelter site and wrap around to the permanent fence that was started on the compost facility border.
- Along the E. edge and Clark Fork Ln., Install at least a 20' wide rolling gate entrance that runs parallel with the road. Install at the 1st entryway to the property from the SE corner.

Separate portion to quote for approval:

Please include an optional quote to install privacy slats along all the of the fence. That will total 263' of the permanent fence and 790' of the temporary fence.

Additional information:

Attached will be separate information for an additional quote. While here installing the fence around the perimeter at 1175 Clark Fork Ln. The Compost Facility will ask for additional pricing to finish their fencing needs as well.

Use the original bid specs for the permanent fence material.

Attached is the map to utilize for the temporary fencing, please build to scale.

The only difference will be the length of the temporary fence run on the East Side.

Onsite contact:

Compost Facility Manager
Cell # 406-207-5964

Jason Duffin
Email: duffinj@ci.missoula.mt.us

10/14/2021

Part 2 of the revised quote for
fencing at 1175 Clark Fork LN.

This portion will be to finish the fencing at 1125 Clark Fork Ln.

Already awarded to Grizzly Fence
By the City and County of Missoula


Scope of Work:

- From the point on the previous bid that we agreed to put a gate, install rolling gate to cross the 30' of road leading into the Compost Facility. 6' tall with 3 row barb wire.
- Gate needs to swing West away from Clark Fork Ln.
- Also needs to tie in with new fence being installed by your team for the 1175 Clark Fork Ln. property along the South side fencing. Right where the permanent fence turns into temporary fence.
- From new gate on the South side of the road leading into the Facility, run 75' of permanent 6' fence with 3 row barb wire to the existing green gate leading into the Compost Facility.
- On the other side of the existing green gate, repair/replace the 43' of existing 6' fence top rail and add 3 row barb wire.

This is all on the previous bid that you wrote up. Use the same specs for fencing materials. Call me if you have any questions.

This portion of the fencing will be paid for by us and I will issue you a PO#. The fencing being done at 1175 Clark Fork Ln. will be a PO issued by the Mayor's office. The 2 will be billed separately.

Thank you,
Jason Duffin
406-207-5964

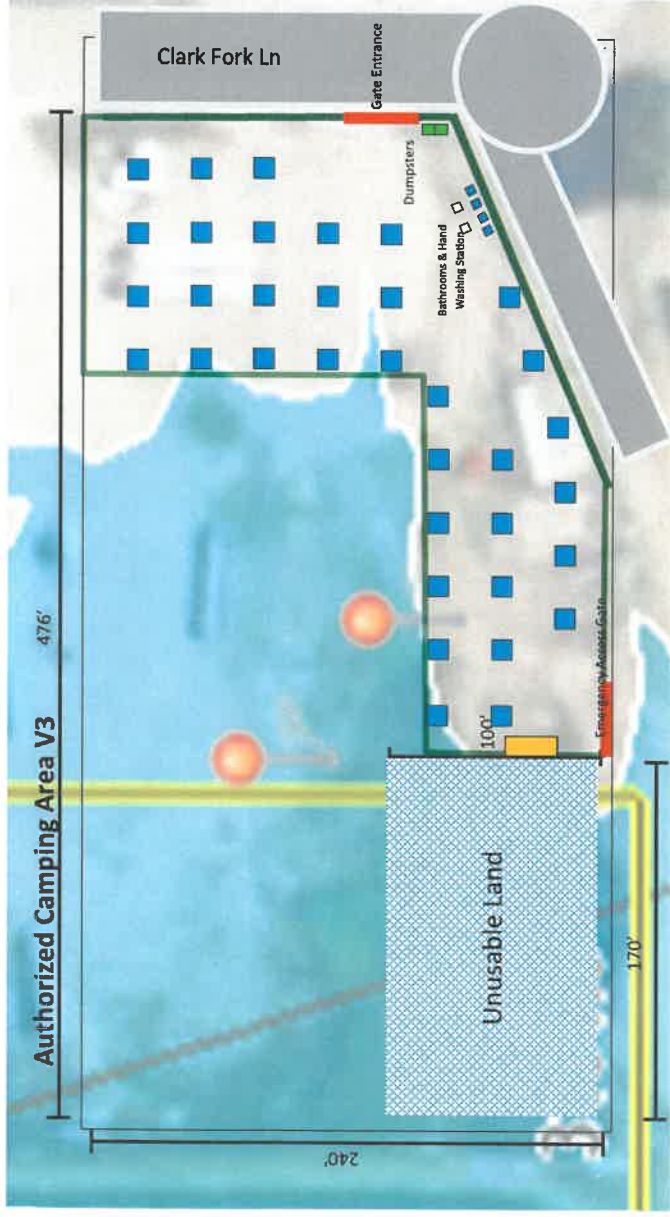

Spacing

Fire

Tents 20' from lot lines, buildings or other tents

12' fire break on all sides of tents

Scale: 1"=100'

■ Tent sites are 10'x 10' w/ minimum 20' spacing between each space (35 sites)

— Fence 6' high

■ Container to store supplies - not open to the public